

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

97RSS467

First Named Inventor or Application Identifier

Randall M. Chung

Title

Infrared Communication System Utilizing Receiver with Multiple Photo-Sensors

Express Mail Label No.

EE582803889US

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)

6. ☐ Microfiche Computer Program (Appendix)

2. ☒ Specification [Total Pages **21**]
(preferred arrangement set forth below)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identical of above copies

3. ☒ Drawing(s) (35 USC d113) [Total Sheets **5**]

4. Oath or Declaration [Total Pages **3**]
(including Supplemental Declaration)

a. ☐ Unexecuted

b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)

[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application is considered as being
part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & Documents(s))

9. ☐ 37 CFR 1.373(b) Statement [☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) [☐ Statement filed in prior application
Status still proper and desired
(PTO/SB/09-12)

15. ☐ Certified Copy of Priority Document(s)
if foreign priority is claimed

16. ☒ Other: Check for fees (\$796.00)

*A new statement is required to be entitled to pay small entity fees, except
where one has been filed in a prior application and is being relied upon.

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:

Prior application information: Examiner _____ Group / Art Unit:


18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

NAME	H. Shannon Tyson, Jr. Akin, Gump, Strauss, Hauer & Feld, L.L.P.		
ADDRESS	816 Congress Avenue, Suite 1900		
CITY	Austin	STATE	Texas
COUNTRY	U.S.A.	TELEPHONE	(512) 499-6200
		ZIP CODE	78701
		FAX	(512) 499-6290

Name (Print/Type)	H. Shannon Tyson, Jr.	Registration No. (Attorney/Agent)	42,193
Signature		Date	9/29/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

(Attorney Docket No. 97RSS467)

TITLE

**INFRARED COMMUNICATION SYSTEM UTILIZING RECEIVER
WITH MULTIPLE PHOTO-SENSORS**

INVENTOR

Randall M. Chung

30542 Via Estoril

Laguna Niguel

CA 92677

Citizenship: USA

ASSIGNEE

Conexant Systems, Inc.

4311 Jamboree Road

Newport Beach, CA 92660-3095

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this correspondence, which includes 21 pages of Specification and 5 pages of Drawings, is being deposited with the United States Postal Service "Express Mail Post Office to addressee" Service under 37 C.F.R. Sec. 1.10 addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231, on Wednesday, September 29, 1999.

Express Mailing Label No.: EE582803889US


Julie Gillespie

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

(Attorney Docket No. 97RSS467)

**TITLE: INFRARED COMMUNICATION SYSTEM UTILIZING RECEIVER WITH
MULTIPLE PHOTO-SENSORS****SPECIFICATION****BACKGROUND****1. Technical Field**

The present invention relates to the field of infrared communications. More specifically, the invention relates to an infrared communication system including a receiver having multiple photo-sensors.

2. Description of Related Art

A conventional infrared communication system utilizes a wireless optical infrared communication link employing a transmitter to emit optical infrared signals that are received by an infrared receiver. A conventional infrared receiver typically employs a single photo-sensor having an "acceptance cone" to detect the emitted infrared signals. The acceptance cone typically has a wide angle of view. This feature permits the reception of infrared signals even when the transmitter and the receiver are misaligned, thus enabling a broader area of reception.

Several optical link protocol specifications have been developed over the past several years with regards to infrared data communications. The Infrared Data Association (IrDA) has issued the Serial Infrared Link Access Protocol (IrLAP), which defines serial infrared links

capable of supporting an optical link with a range of at least one meter. An IrDA serial infrared interface must be able to operate at a minimum signaling rate of 9.6 kb/sec, up to a rate of 4Mb/s wherein the nominal pulse duration is 125 nsec.

Conventional IR receivers having a wide angle acceptance cone, such as those
5 implemented in accordance with the IrLAP specification, typically sense incoming infrared light within a specified solid angle. In addition, IR receivers also sense light emanating from ambient sources, including electromagnetic waves, sunlight, incandescent lighting and fluorescent lighting. These ambient sources interfere with true optical signals, thus lowering the signal to noise ratio of the communication system. These conditions limit not only the signal to noise
10 ratio, but also reduce the optical link range of the communication system. In addition to the foregoing problems, conventional infrared communication systems typically operate at relatively low speeds. Furthermore, because conventional IR receivers have low sensitivity, conventional IR transmitters utilize transistors having high power output, thus resulting in relatively high power consumption.

15 Further disadvantages of the related art will become apparent to one skilled in the art through comparison of the drawings and specification which follow.

SUMMARY OF THE INVENTION

Various aspects of the present invention can be found in a communication system that utilizes optical infrared signals. The communication system includes an infrared receiver that receives the optical infrared signals. The infrared receiver utilizes an array of photo-sensors for detecting optical infrared signals within a solid angle. Each photo-sensor, however, detects optical infrared signals in only a predetermined portion of the solid angle. On detecting the optical infrared signals, each photo-sensor converts and forwards a corresponding electrical signal to a filter circuit that selectively determines whether the signal meets a predetermined criteria such as a frequency threshold. The filter circuit or other processing circuitry is thereby able to identify a photo-sensor(s) providing the optimal infrared link.

In some embodiments, an optical system for receiving the optical infrared signals is included in the infrared receiver. The optical system comprises a lens assembly that focuses the optical infrared signals toward the array of photo-sensors. The lens assembly may employ a lens having an imperfect focus to facilitate the detection of optical infrared signals emanating from transmitters that have a relatively small solid angle.

In other embodiments, each photo-sensor within the infrared receiver is provided with a noise suppression circuit. In addition, the array of photo-sensors within the transceiver may be one dimensional or multidimensional.

Further aspects of the present invention may be found in a method used by a photo-sensor array having a plurality of photo-sensors to detect the optical infrared signals within a solid angle. The photo-sensor array receives and detects optical infrared signals only within a predetermined portion of a solid angle. Other aspects of the present invention may be found in

an infrared receiver that filters converted electrical signals based on a predetermined frequency or power threshold.

The present invention provides high-speed communication that may be IrDA compliant. Further, the present invention may find use in PCs, handheld computers, cell phones, printers, personal digital assistants or other devices having ports. The signal to noise ratio of the present invention improves upon prior solutions, and provides accurate optical communications even when two optical interface ports are not perfectly aligned. Advantageously, the present invention provides an infrared receiver having a wide angle of view with an improved ability to reject false signals.

Other aspects of the present invention will become apparent with further reference to the drawings and specification, which follow.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic diagram of an exemplary infrared communication system having an IR transmitter and an IR receiver according to the present invention, and illustrating the transmission of data through an enhanced optical communication link.

5 FIG. 2 is an exemplary diagram of an input interface optical port of an IR receiver.

FIG. 3 is an exemplary embodiment of the communication system of FIG. 1 illustrating the detection of optical infrared signals by an array of photo-sensors according to the present invention.

10 FIG. 4A is an exemplary embodiment of a photo-sensor array according to the present invention.

FIG. 4B is an alternate embodiment of an exemplary photo-sensor array according to the present invention.

15 FIG. 5 is a schematic diagram providing exemplary details of the infrared communication system of FIG. 1.

DETAILED DESCRIPTION OF DRAWINGS

FIG. 1 is an exemplary schematic diagram of an infrared communication system having both an IR transmitter and receiver according to the present invention, and illustrating the transmission of data through an enhanced optical communication link. More specifically, data is transmitted via an enhanced optical communication link 114 to an IR receiver 117 incorporating an array of photo-sensors 201 (FIG. 3).

A user wishing to utilize a communication system 100 may initiate the transfer of data through a user interface 105. The data typically comprises strings of binary characters, and may be stored within memory 109 prior to transmission. Responding to the user interface 105, a processing circuitry 111 directs data to an IR encoder 107 that serially encodes the data and outputs an encoded binary stream. The encoded binary stream is then forwarded to a transmitter interface 103. The processing circuitry 111 next directs the transmitter interface 103 to initiate optical signaling. Thereafter, the transmitter interface 103 transmits the encoded binary stream for reception by the IR receiver 117.

An IR detector unit 121 within a receiver interface 119 detects the encoded binary stream and outputs corresponding electrical signals. Advantageously, the IR detector unit 121 comprises multiple photo-sensors (such as those referenced in FIG. 3) that enables data transmission via the enhanced optical communication link 114. A processing circuit 123 directs the received electrical signals to the IR decoder 129 for decoding. In response, the IR decoder 129 decodes the electrical signals and outputs the original binary character stream. Although various schemes exist, the present embodiment is referenced with regards to serial encoding for data transmission.

The communication system 100 is capable of complying with various standards such as the *IrDA Serial version 1.2 Infrared Physical Layer Specification*. In particular, the IR

transmitter 101 emits a Serial Infrared interaction Pulse (SIP) at least once every 500 ms to quiet systems with lower signaling rates (115.2kb/s and lower). The SIP stimulates a start pulse that enables the lower signaling system to listen for at least 500 ms. Data may be transmitted through the optical communication link 114 at a signaling rate of 4.0 Mb/s as per IrDA specifications, or
5 at even higher signaling rates.

Each component within the communication system 100 is not limited as referenced but may encompass other embodiments without departing from the spirit of the present disclosure. The user interface 105 within the IR transmitter 101 may comprise various manual or voice input mechanisms, including a touch pad, keypad, independent function buttons, voice recognition
10 software, microphones, etc. Processing circuitry 111 and 123 co-ordinate and synchronize various tasks relating to the transmission and receipt of data, and may be external to the communication system 100 or embodied within a specific component. Encoding may be performed, for example, by either a hardware or software controller. The transmitter interface
103 typically includes a driver and a Light Emitting Diode (LED).

As set forth in greater detail below, the receive interface 119 features an IR detector unit
15 121 that advantageously employs a photo-sensor array having at least two photo-detectors for detecting optical signals. In addition, a plurality of photo-sensor arrays may be employed.

The IR encoder 107 may employ various encoding schemes, including a Pulse Position Modulation (PPM) encoding scheme. PPM encoding is achieved by defining a data symbol
20 duration (D_t) and subdividing D_t into a set of equal time slices called "chips." One of a plurality of possible bit combinations is represented by each chip position within a data symbol. Each chip has a duration of C_t given by the formula:

$$C_t = D_t / \text{Base},$$

where “Base” equals the chips or number of pulse positions in each data symbol. The Base for IrDA PPM 4.0 Mb/s systems is defined as four, and the resulting modulation scheme is called “four pulse position modulation (4PPM). Further details regarding 4PPM data encoding and signaling rate is specified at page 14 of the *IrDA Serial version 1.2 Infrared Physical Layer Specification* (IrDA reference).

FIG. 2 is an exemplary diagram of an input interface optical port 150 of an IR receiver 117 capable of being implemented in accordance with the present invention. The illustration is provided for definitional purposes. An optical axis 152 of the port 150 is chosen to be normal to the surface that contains the optical port 150. A center 154 of the optical port 150 is usually used as the reference point, and is located where the optical access 152 exits the port 150. Angular range of an optical port is defined with reference to a spherical coordinate system having a radial distance R, angular coordinates that are relative to a defined access, and distance D along the X axis. The spherical coordinate system axis is normal to the emitting or receiving surface of the optical port 150 and intersects the optical port at its center 154. Thus, the angular range of an optical port 150 as illustrated is a cone whose apex is at the intersection of the optical axis 152 and the perimeter surface of the optical port 150.

Each optical link generally has to satisfy certain predetermined parameters, usually defined in a standard. The half-angle 158 value is defined as the half of a solid (3-dimensional) angle of the cone whose apex is at the center 154 of the optical port 150 and whose axis is normal to the surface of the port 150. The half-angle 158 value is determined by the minimum angle from the normal to the surface where the minimum allowable intensity and angular range is encountered. Therefore, in Figure 2, a half-angle 158 value is defined for an angle with an apex in the center 154, as the minimum angle between the optical axis 152 and a surface, defined

in Figure 2 by a line 156, where the minimum allowable intensity in angular range is encountered.

Minimum allowable intensity in angular range, defined by power per unit solid angle (milliWatts or microWatts per steradian), is the minimum allowable source intensity within the defined angular range. Maximum allowable intensity in angular range, defined by power per unit solid angle (milliWatts per steradian Sr), is the maximum allowable source intensity within the defined angular range. If there is optical port asymmetry, as long as the maximum half-angle of the distribution is not greater than the allowable half-angle range maximum, and the minimum half-angle of the distribution is not less than the allowable half-angle minimum, the half-angle range specification is met.

Signaling rate (also called the bit rate and presented in kilobits or megabits per second) is the rate at which data and protocol information is sent or received. Peak wavelength (measured in nanometers) is the wavelength at which the optical output source (IR Transmitter) intensity is at a maximum. Maximum irradiance in angular range, defined by power per unit area in milliWatts per square centimeter, is the optical power delivered to the IR detector 121 by a source operating at the maximum allowable intensity in angular range at minimum link lengths, which does not cause receiver overdrive distortion and possible related link errors. Minimum irradiance in angular range is defined by power per unit area in milliWatts or microWatts per square centimeter. The IR receiver 117 must not have an error when it operates at the minimum allowable intensity in the angular range into the minimum half-angle range at the maximum link lengths. The IR receiver 117 must also be able to operate at the minimum irradiance in angular range from zero angular degrees to at least the minimum angular range value.

Typical optical lengths operate at this alignment angle from zero to at least 15 degrees, with no maximum limit imposed on the misalignment half-angle for the active interface ports. Optimally, the intensity must be less than or equal to the predefined maximum allowable intensity in angular range, in the angular region less than or equal to 30 degrees, and less than or equal to the predefined minimum allowable intensity in angular range, in the angular region greater than 30 degrees. The intensity must be greater than or equal to the predefined minimum allowable intensity in angular range, in the angular region less than or equal to 15 degrees.

Although the IrDA IrLA protocol defines serial infrared links would should be able to support the length between the two nodes of at least one meter, the conventional low cost optical electric technology optical length cannot obtain accurate free space optical communications at four Mbps rate at that distance and are limited to a range of about one foot. The range at that rate is limited by low sensitivity and low signal-to-noise ratio of the IR Receiver and by the limited amount of optical power of the transmitter. Typical IR Receivers have a single photo sensor in their active input interface optical port detector which senses all incoming IR light which is in a specified solid angle. As noted above, some of the incoming light may come from the accompanying IR Transmitter, but some light may come from ambient sources, such as sunlight or light bulbs. The undesired light will lower the signal-to-noise ratio of the IR Receiver that is used for optical communication.

The IrDA IrLAP link power measurement can be made on a single pulse as a peak optical power level or by averaging a sequence of optical signal pulses in converting to peak levels. It should be noted that there is no size constraint for the detector in the IrDA IrLAP receiver. Typically, spatial resolution is measured at 2×10^{-5} steradians, which may be achieved with a detector having an effective area of 0.2 cm^2 (5 mm diameter) at 1 meter distance, which subtends

a half-angle of 0.14 degrees. The size of the photo detector should be such to avoid near field optical effects, but enough to receive a robust signal. The intensity is measured by measuring optical power, distance, and angle from a reference point.

Optical powers converted to intensity by the formula:

5 $\text{Intensity (mW/Sr)} = [\text{Power (mW)}/\text{Detector Solid Angle (Sr)}].$

Detector Solid Angle in steradians is given by the formula:

$$\text{Detector Solid Angle (Sr)} = 2\pi [1 - \cos(\text{half-angle})],$$

where the half-angle is the half of the angle subtended by the detector, viewed from the reference point.

10 Detector Solid Angle can be approximated with the formula:

$$\text{Detector Solid Angle (Sr)} \sim [\text{Area of Detector}/r^2],$$

where the variable “r” is the distance between the transmitter and the reference point.

15 An IR Receiver according to the present invention provides increased sensitivity and improved signal-to-noise ratios, thereby increasing the operating range in which accurate optical signals can be obtained and/or permitting use of transmitters with lower transmitter power abilities. An IR Receiver implemented in accordance with the invention may be manufactured using low cost optical technology, and is able to provide accurate free space optical communications at long lengths, even when two optical interface ports are not perfectly aligned.

20 FIG. 3 is an exemplary embodiment of the communication system of FIG. 1 illustrating the detection of optical infrared signals by an array of photo-sensors 201 according to the present invention. Specifically, the array of photo-sensors 201 within the receiver interface 119 detects infrared signals emitted from, for example, active infrared sources 215, 219, and 221.

The receiver interface 119 includes an optical system 209 that directs the emitted infrared signals along one or more optical paths 225, 229, 231, toward the array of photo-sensors 201. The infrared signals are then detected by the array of photo-sensors 201, which produce corresponding electrical signals.

5 In the disclosed embodiment, the optical system 209 includes a lens assembly 211 responsible for focusing the optical infrared signals toward the array of photo-sensors 201. The lens assembly 211 may be comprised of a material which is transparent to infrared light but blocks visible light, for example. In addition, the lens may be designed such that the lens focus is diffused, rather than sharp, enabling the detection of infrared signals from light sources having
10 small solid angles (e.g., the point source transmitter). That is, without a lens having a diffused focus, infrared signals may fall on a narrow gap 205 between individual IR photo-sensors 203.

The array of photo-sensors 201 is a solid state image sensor such as a Charged Couple Device (CCD), or any other type of photo-sensor known to those skilled in the art. Further, the array of photo-sensors 201 may be either one dimensional or multi-dimensional as further
15 described in conjunction with FIGS. 4A and 4B. Each IR photo-sensor 203 within the array of photo-sensors 201 is separated by a narrow gap 205, and is sensitive to a predetermined portion of a solid angle. Advantageously, because each separate IR photo-sensor 203 is sensitive to a portion of the total solid angle (twice the half angle 207), the determination of which IR photo-sensor 203 is receiving a valid signal allows the rejection of noise from the other IR photo-
20 sensors 203.

In an alternate embodiment, each IR photo-sensor 203 is provided with a noise suppression circuit, a frequency threshold filter circuit, and power threshold circuitry that permits IR signals with insufficient transmission characteristics to be disregarded. Each of these

functions may be implemented as part of the processing circuitry 123. The signals received from each IR photo-sensor 203 may be passed through a summing circuit prior to forwarding to an IR decoder 129.

FIG. 5 is a schematic diagram providing exemplary details of the infrared communication system of FIG. 1. The output signal from each photo-sensor 501, 503 is amplified by programmable gain circuits (GRC) 505 and 519, respectively. The amount of gain can be dynamically adjusted by a photo-sensor selection control circuit 511. After amplification, the photo-sensor signal is converted from an analog signal to a digital signal via an analog to digital converter 507 or 514. The photo-sensor selection control circuit 511 examines each digitized photo-sensor signal to determine if it meets the predetermined criteria for pulse width and pulse frequency. If the signal does not meet the predetermined criteria, then the signal is most likely noise and is gated via gating circuits 509 or 515 by setting it to zero. The final output signal comprises a summation of signals from one or more qualified photo-sensor signals. The summation process is performed by a summing circuit 513, thus removing spurious signals which would only contribute to the noise in the system.

The present embodiment requires relatively low power because of its increased sensitivity, further resulting in longer communication ranges. Further advantages of the present embodiment include the protection of each IR photo-sensor 203 from saturation that may result from optical power emitted from an adjacent IR source. This is because the irradiance level of each IR photo-sensor 203 within the array of photo-sensors 201 is reduced by a factor equal to the number of photo-sensors within the array. Moreover, the IR detector 121 of the present invention increases optical communication range without increasing IR transmitter power. The present embodiment is particularly applicable to serial infrared links, obtained with low cost

optoelectronic technology, wherein the optical interfaces between transceivers need not be perfectly aligned.

The present embodiment may be configured to operate at a Minimum Intensity in Angular Range of 10 uW/cm^2 . The Minimum Intensity in Angular Range is the power per unit area (milliWatts per square centimeter). An IR receiver meets the Bit Error Ratio (BER) when operating at the Minimum Intensity in Angular Range into the minimum Half-Angle Range at the maximum link length, as per IrDA specifications. The BER is the number of errors divided by the total number of bits. It is a probability, generally very small, and is often expressed as a negative power of 10 (e.g., 10^{-8}). While no minimum intensity requirement exists, the Maximum Irradiance in Angular Range of the present embodiment is 500 mW/cm^2 where, Detector Solid Angle (Sr) = $2\pi [1 - \cos(\text{Half-Angle})]$

FIG. 4A is an exemplary embodiment of a photo-sensor array according to the present invention. More specifically, the configuration of a one dimensional photo-sensor array 301 for receiving optical infrared signals from a light source is illustrated.

A plurality of photo-sensors 303 are aligned within the photo-sensor array 301. The photo-sensors 303 may be horizontally or vertically aligned with respect to the center axis of optical system 209 (FIG. 3), for example. Each photo-sensor 303 receives light and outputs a corresponding electrical signal to a dedicated filter circuit, although a collective filter circuit may be employed.

There is no number or size constraint for the IR photo-sensors 303. A relatively high number of photo-sensors 303 may be employed. The size of the photo-sensor array 301 may, however, have an effective area of less than 0.2 cm^2 (5 mm diameter). This size should be small

enough to avoid near field optical effects but enough to receive a robust signal. The resolution of spatial intensity variation should be as fine as the smallest detector.

FIG. 4B is an alternate embodiment of a photo-sensor array according to the present invention. More specifically, a two-dimensional photo-sensor array 305 that receives optical signals from a light source is illustrated. A first plurality of horizontally arranged photo-sensors 307 is coupled with a second plurality of vertically arranged photo-sensors 309. The present embodiment functions as previously referenced in FIG. 4A, and may permit a greater degree of misalignment between the IR receiver and transmitter.

The present invention could be used for any electronic product which uses a fast wireless IR interface, such as a printer, portable computer, personal digital assistant, electronic camera and the like. The optical interface IR detector of the present invention operates independent of the optical link technology and may transfer any type of digital data directly from one computer to another, from a computer to a peripheral, or from a peripheral to a peripheral, such as from a camera to a printer. The present invention, although applicable to any optical interface IR detector is believed to be especially applicable to optical link IR receivers which satisfy the IrLAP specification for half-duplex mode serial infrared links, operating at signaling weights from 9.6 Kb/sec to 4 Mbps or higher.

Although a system and method according to the present invention has been described in connection with the preferred embodiment, it is not intended to be limited to the specific form set forth herein, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents, as can be reasonably included within the spirit and scope of the invention.

CLAIMS

What is claimed is:

- 1 1. A communication system for use with a transmitter that transmits optical infrared
2 signals, the communication system comprising:
3 an infrared receiver employing an array of at least two photo-sensors that combine to
4 detect the optical infrared signals within a solid angle, and
5 each photo-sensor within the array of photo-sensors detects optical infrared signals within
6 a predetermined portion of the solid angle.
- 1 2. The communication system of claim 1 wherein the infrared receiver further comprises:
2 a lens assembly for focusing the optical infrared signals onto the array of photo-sensors.
- 1 3. The communication system of claim 2 wherein the lens assembly employs a lens having
2 an imperfect focus.
- 1 4. The communication system of claim 1 further comprising:
2 filter circuitry coupled to each of the at least two photo-sensors, the filter circuitry
3 filtering optical infrared signals falling below a predetermined threshold frequency value.
- 1 5. The communication system of claim 4, further comprising:
2 an output summing circuitry that receives and sums unfiltered optical infrared signals.
- 1 6. The communication system of claim 4 wherein each photo-sensor provides an output
2 signal corresponding to the received optical infra-red signal, further comprising:
3 a programmable gain circuitry coupled to each photo-sensor that amplifies the output
4 signal of each photo-sensor.

1 7. The communication system of claim 6 wherein the programmable gain circuitry may
2 dynamically adjust the amount of gain.

1 8. The communication system of claim 6, further comprising:
2 analog to digital converter circuitry coupled to the programmable gain circuitry for
3 converting the output(s) of the programmable gain circuitry to digital signals.

1 9. The communication system of claim 8, further comprising:
2 a photo-sensor selection control circuit coupled to the analog to digital converter, the
3 photo-sensor selection control circuitry determining whether a given photo-sensor signal meets a
4 predetermined pulse width and frequency criteria and, if not, causing the given photo-sensor
5 signal to be suppressed.

1 10. The communication system of claim 1 wherein the array of photo-sensors is one
2 dimensional.

1 11. The communication system of claim 1 wherein the array of photo-sensors is multi-
2 dimensional.

1 12. The communication system of claim 1 operating in a half duplex serial mode with a range
2 of at least one meter.

1 13. The communication system of claim 1 operable at solid angles from zero to
2 approximately thirty degrees.

1 14. A method for capturing optical infrared signals within a solid angle, the method
2 comprising:

3 providing a photo-sensor array having at least two photo-sensors;

4 detecting, by each photo-sensor within the photo-sensor array, optical infrared signals
5 only within a predetermined portion of the solid angle; and

6 converting the optical infrared signal into corresponding electrical signals.

1 15. The method of claim 16, further comprising filtering the optical infrared signals that are
2 below a predetermined threshold.

1 16. The method of claim 14, further comprising:

2 providing a lens for directing the optical infrared signals to the photo-sensor array.

1 17. The method of claim 16, wherein the lens is a diffused lens having an imperfect focus.

1 18. An infrared receiver that detects optical infrared signals, the infrared receiver comprising:
2 a photo-sensor array comprising a plurality of photo-sensors, each photo-sensor receiving
3 optical infrared signals within a predetermined portion of a solid angle and converting received
4 optical signals to electrical signals; and

5 a signal selection circuitry coupled to the photo-sensor array, the signal selection circuitry
6 selectively outputting corresponding electrical signals based on predetermined criteria.

1 19. The infrared receiver of claim 18, wherein the predetermined criteria is a pulse frequency
2 threshold.

1 20. The infrared receiver of claim 18, wherein the predetermined criteria is a power
2 threshold.

1 21. The infrared receiver of claim 18 further comprising an optical system arranged to direct
2 optical infrared signals to the photo-sensor array.

1 22. The infrared receiver of claim 18 wherein the array of photo-sensors detects signals
2 operating within a signaling rate of 9.6kb/s through 4mb/s.

ABSTRACT

A communication system including an infrared receiver that receives optical infrared signals. The infrared receiver utilizes an array of photo-sensors for detecting optical infrared signals within a solid angle. Each photo-sensor, however, detects optical infrared signals in only a predetermined portion of the solid angle. On detecting optical infrared signals, each photo-sensor converts and forwards a corresponding electrical signal to a filter circuit that selectively determines whether the signal meets a predetermined criteria such as a frequency threshold. The filter circuit or other processing circuitry is thereby able to identify photo-sensor(s) providing an optimal infrared communication link. The infrared receiver may include an optical system comprising a lens assembly that directs the optical infrared signals towards the array of photo-sensors. In one embodiment, the lens assembly employs a diffused lens having an imperfect focus to facilitate the detection of optical infrared signals emanating from transmitters that have a relatively small solid angle.

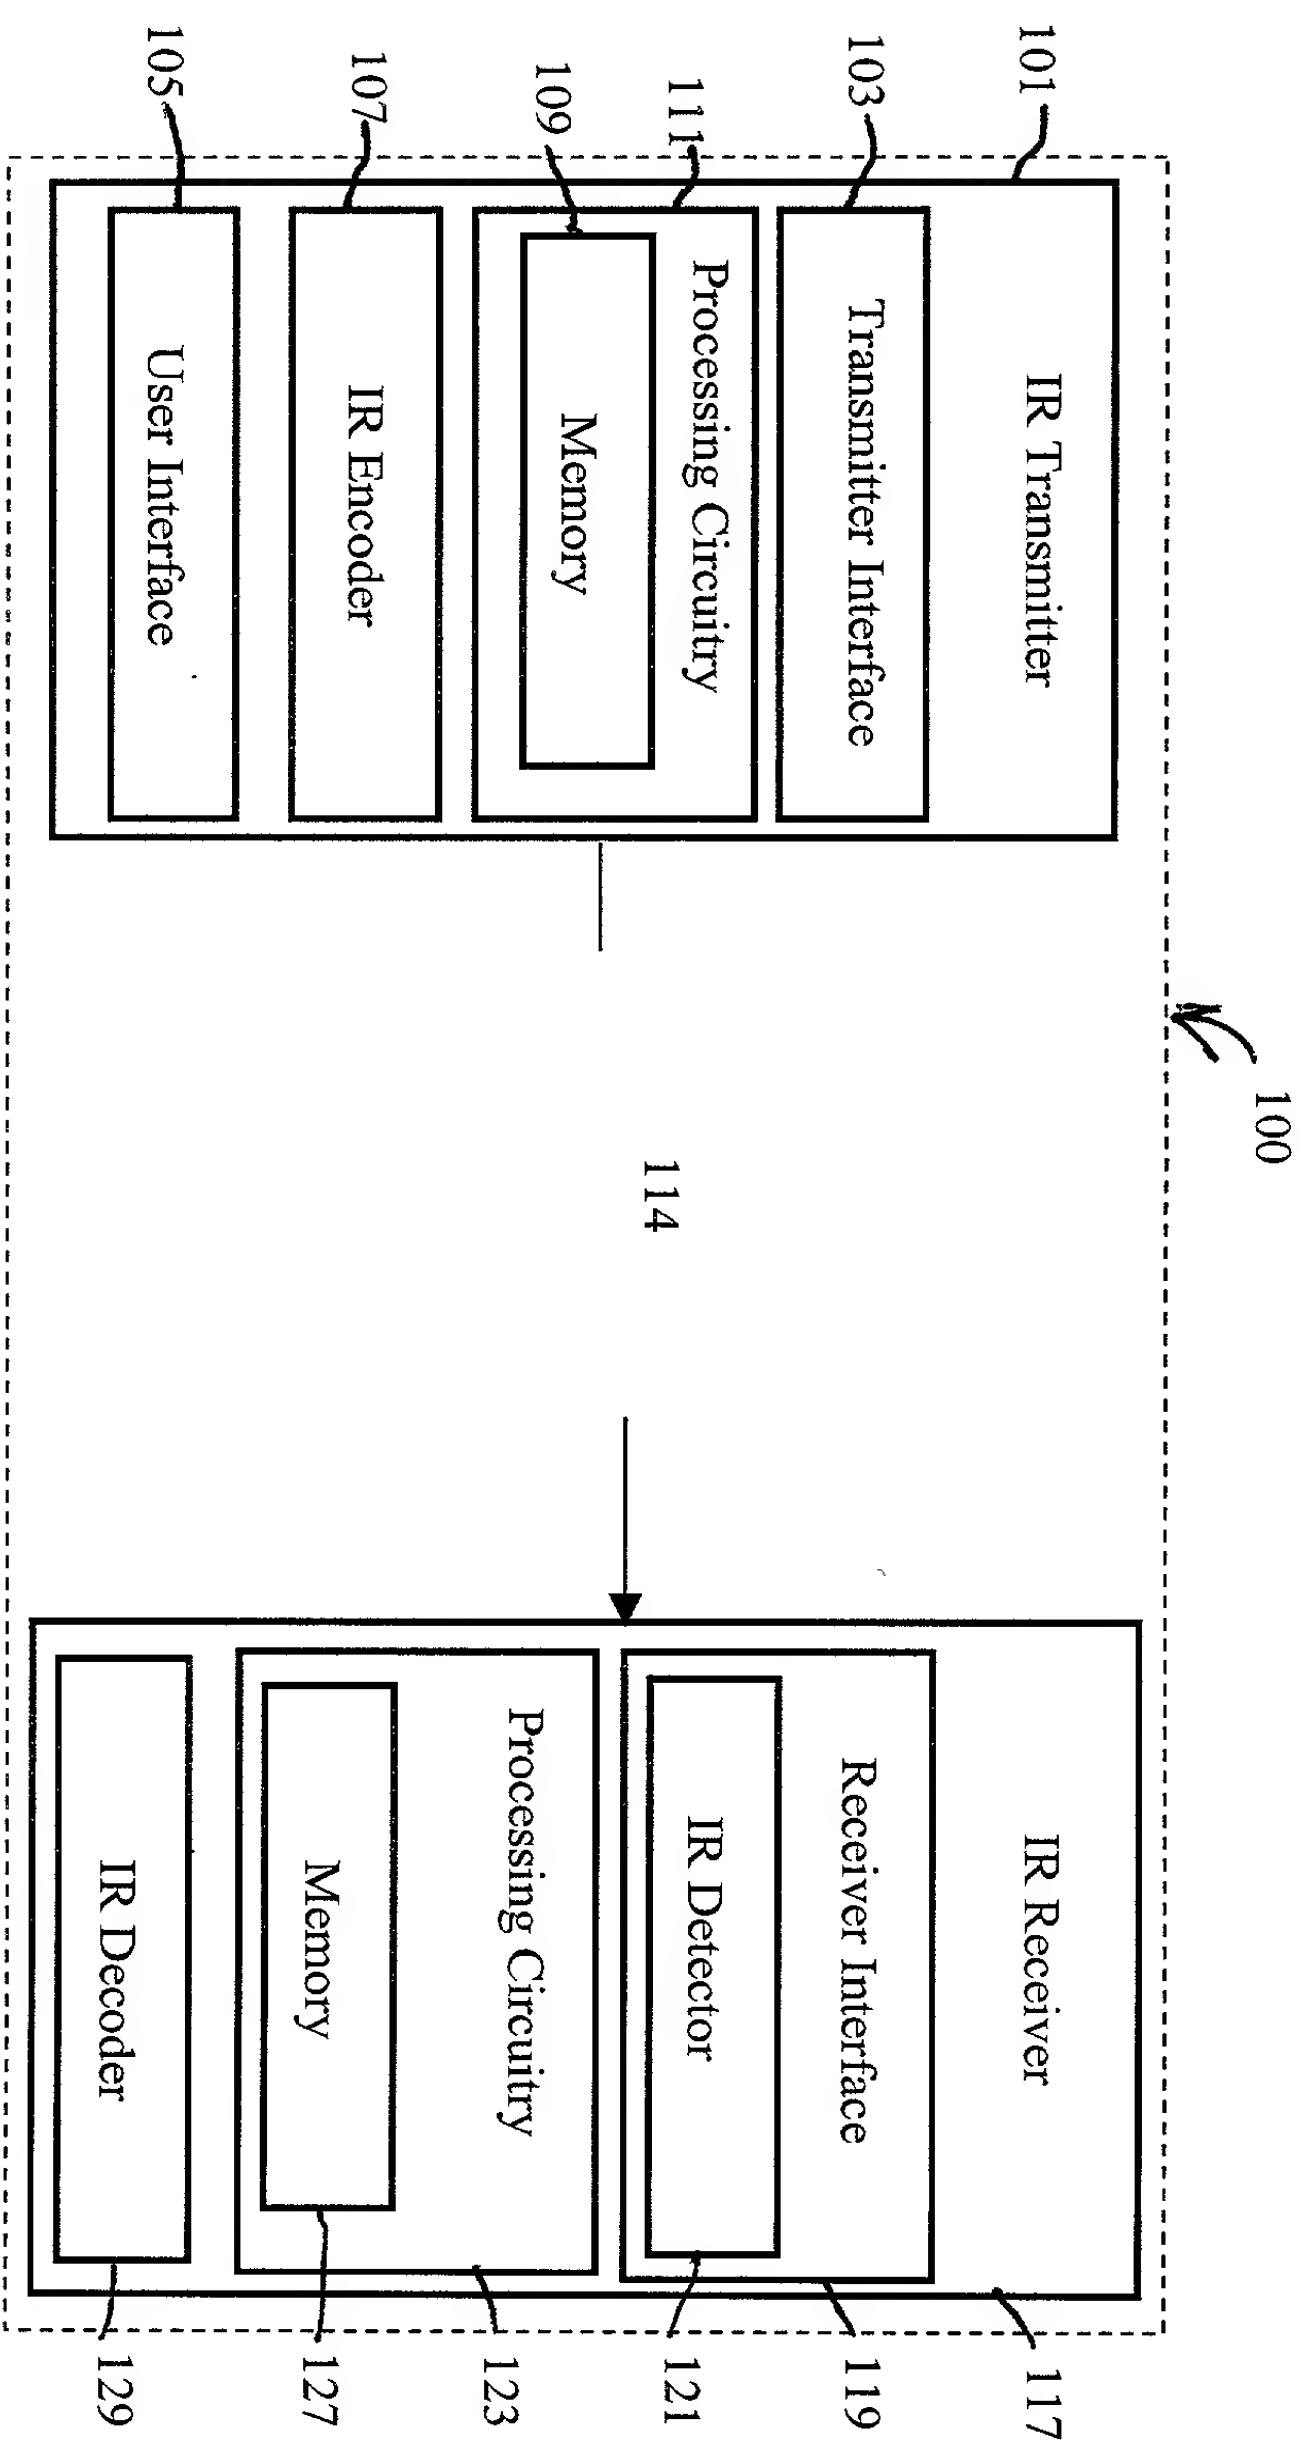


FIG. 1

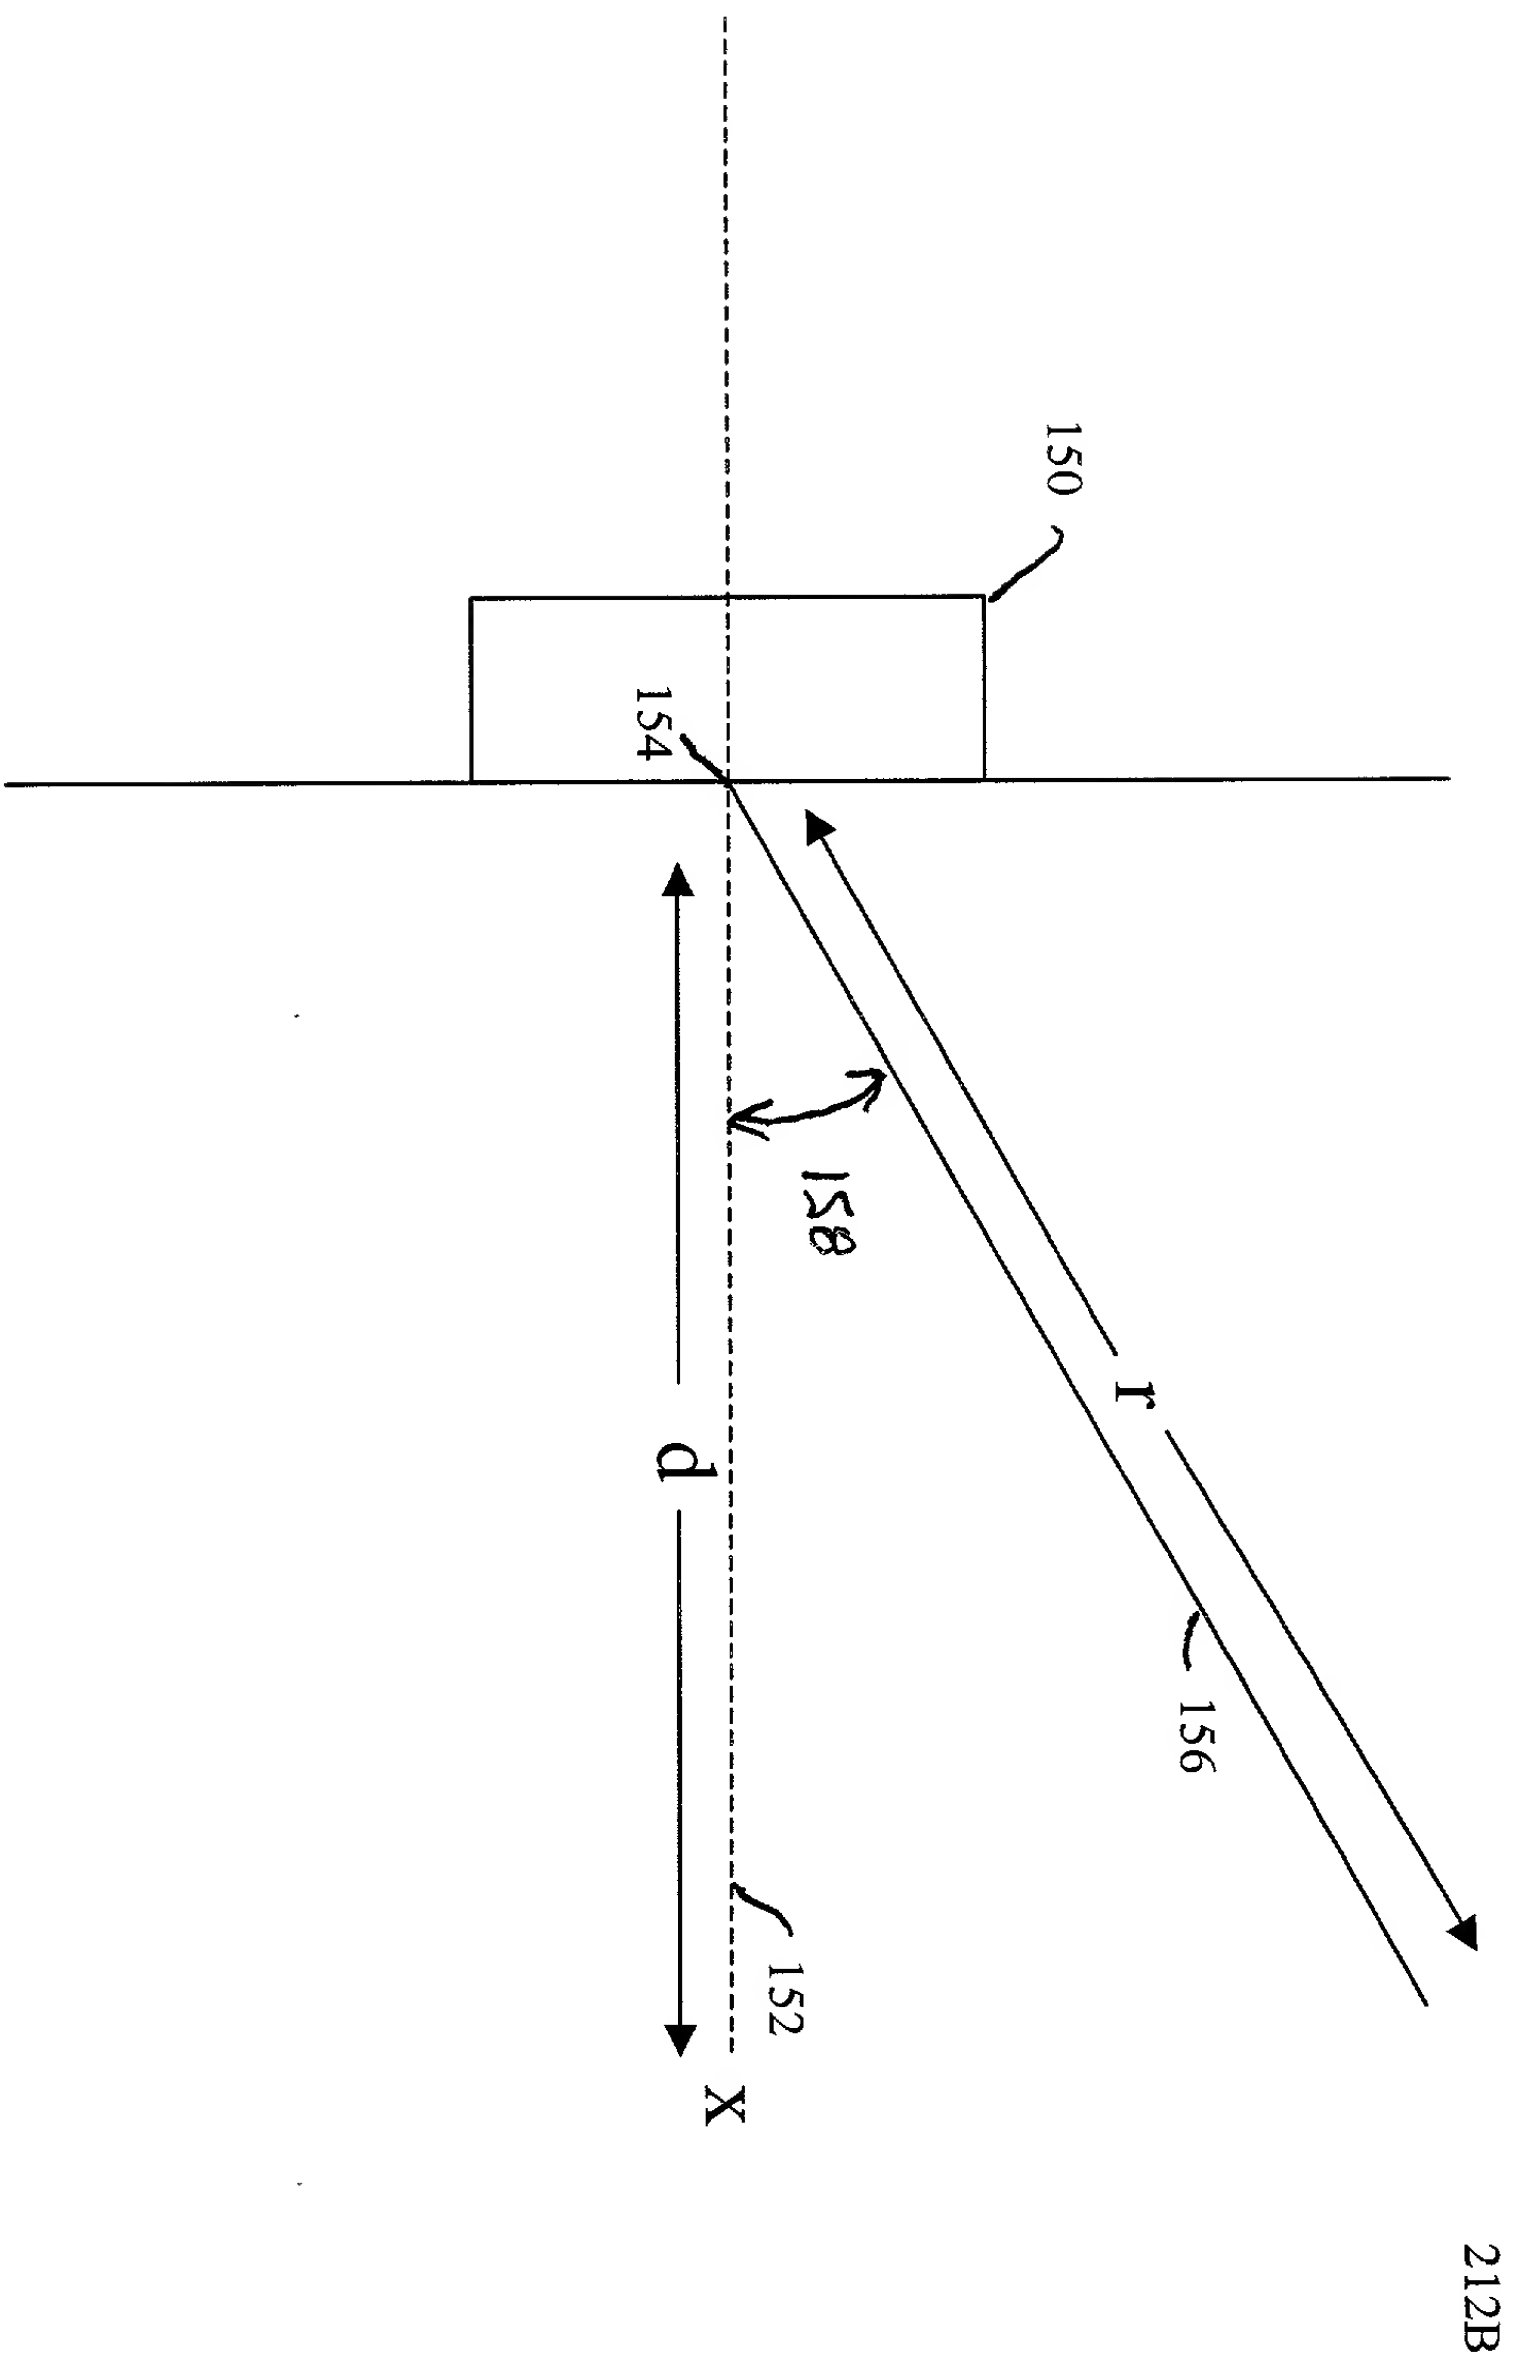


FIG. 2

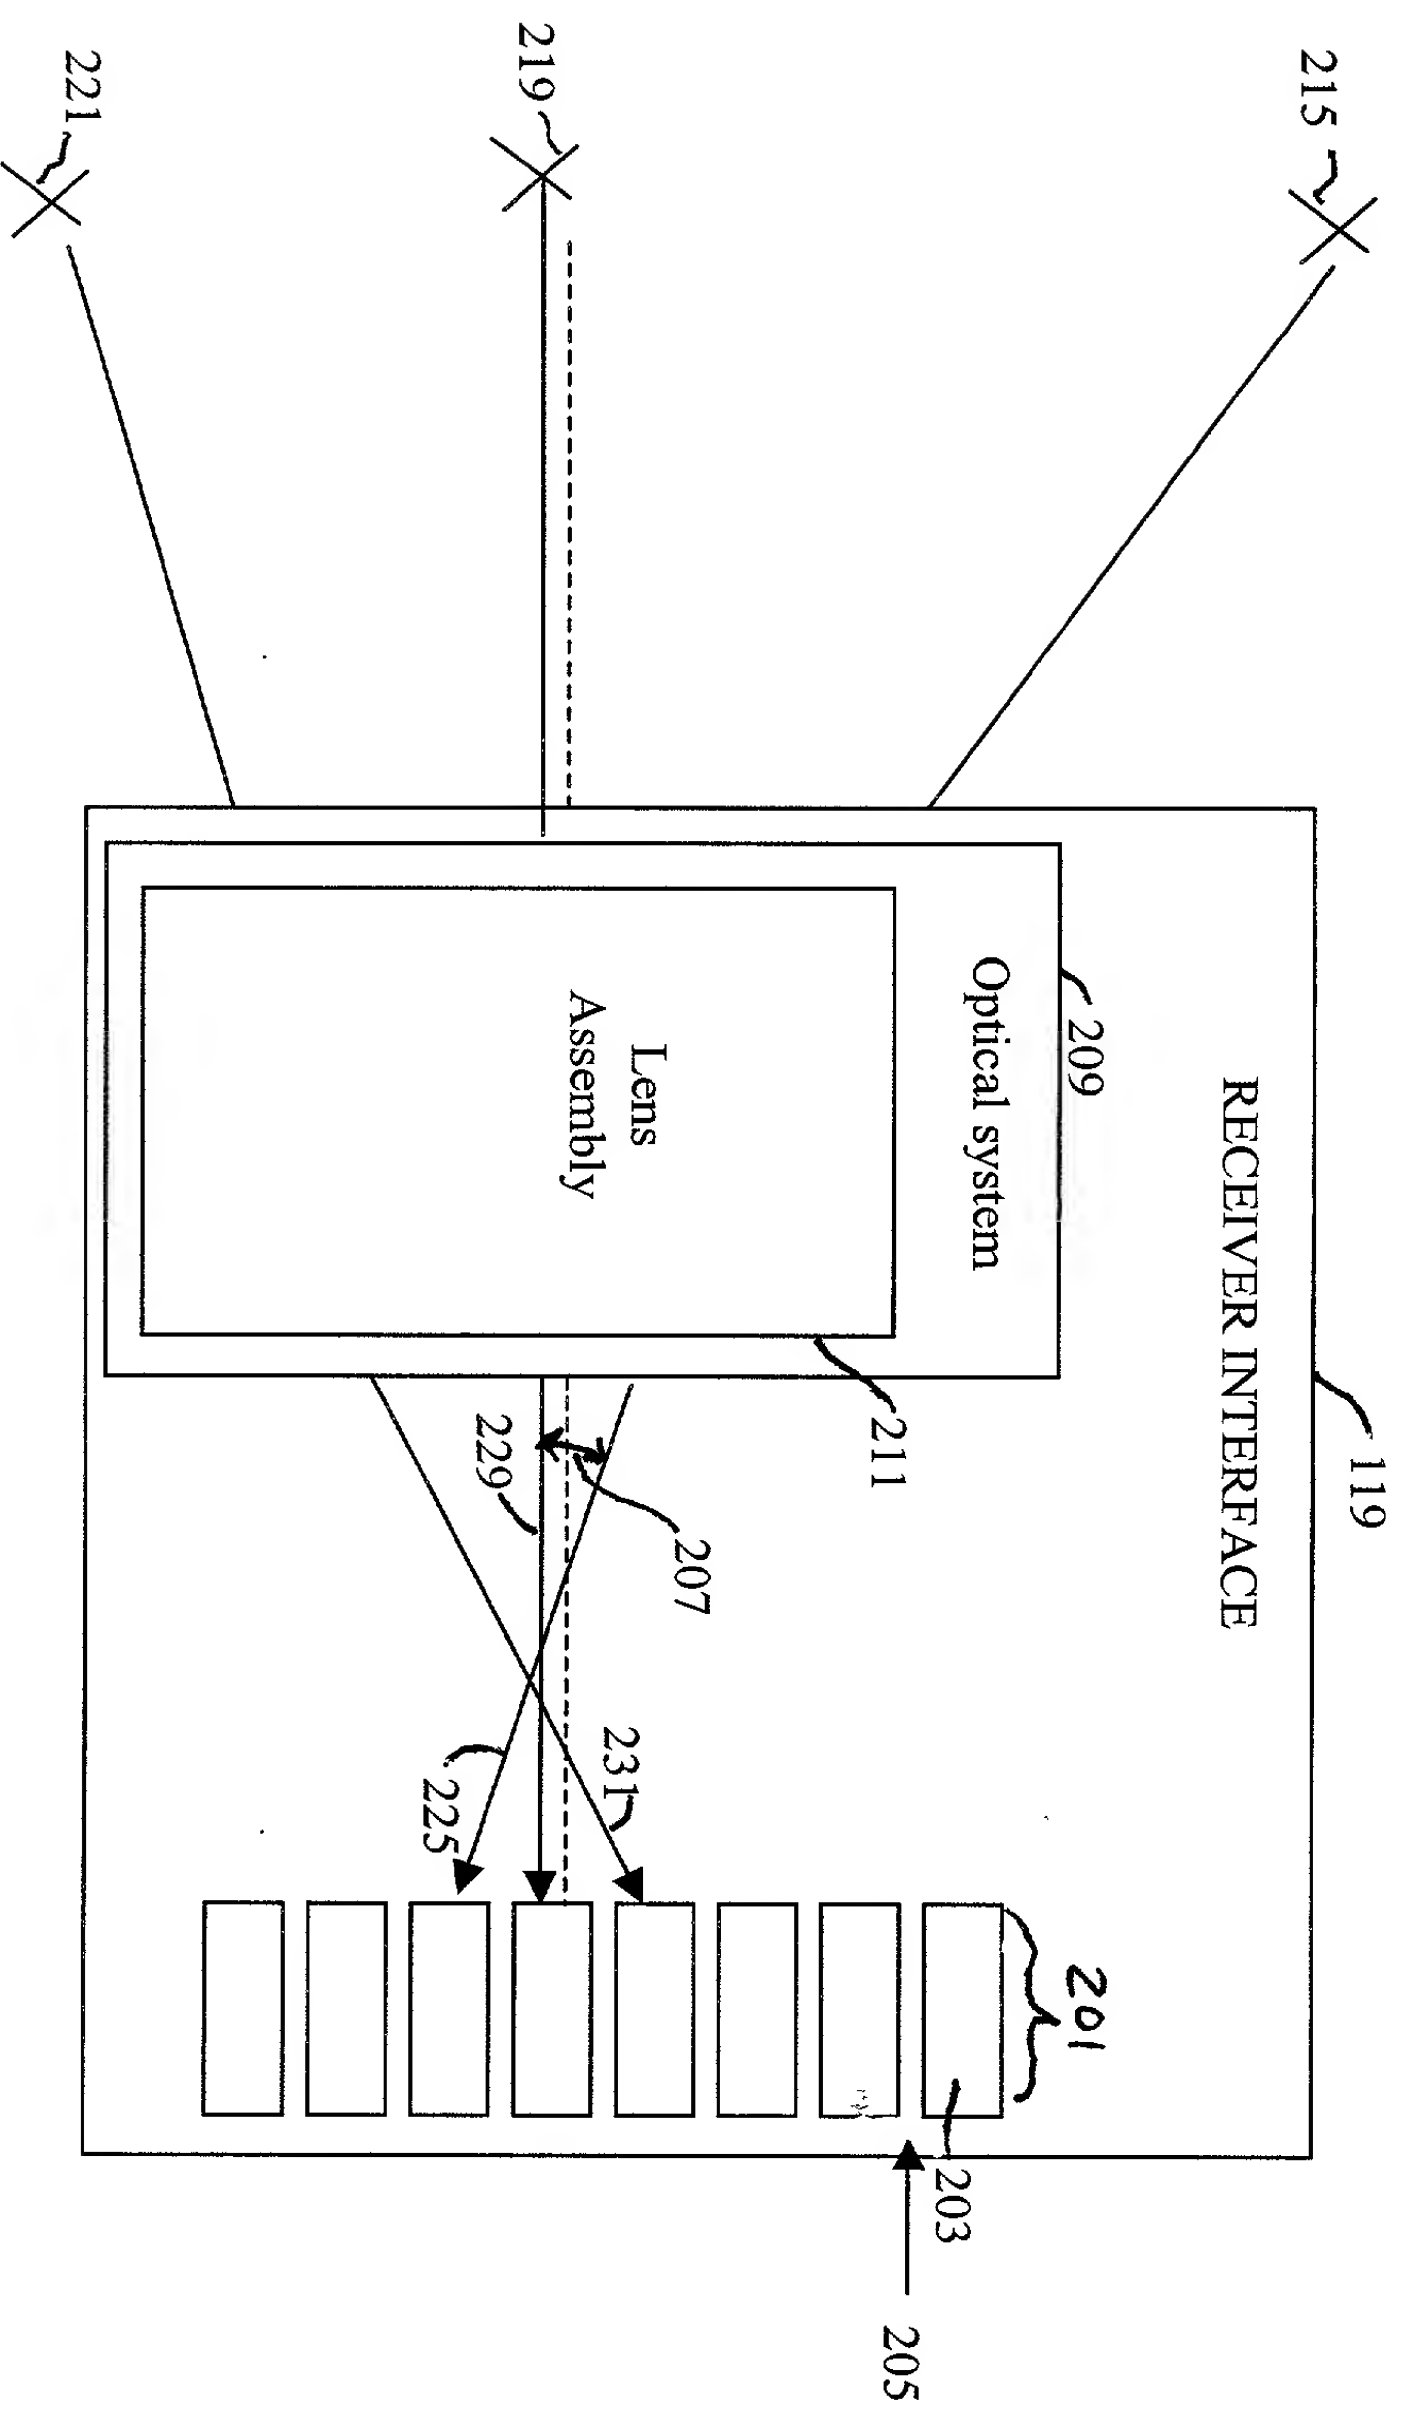


FIG. 3

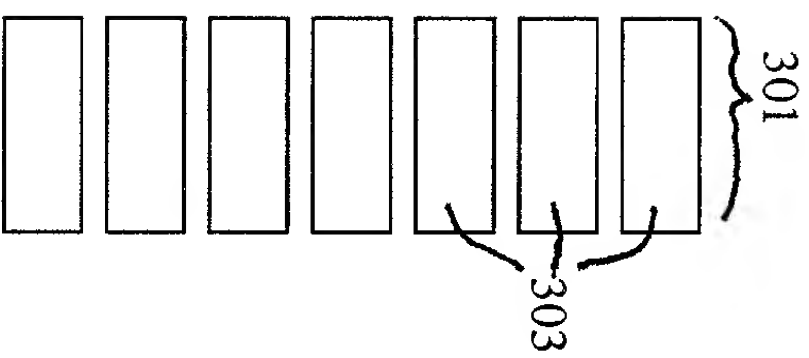


FIG. 4A

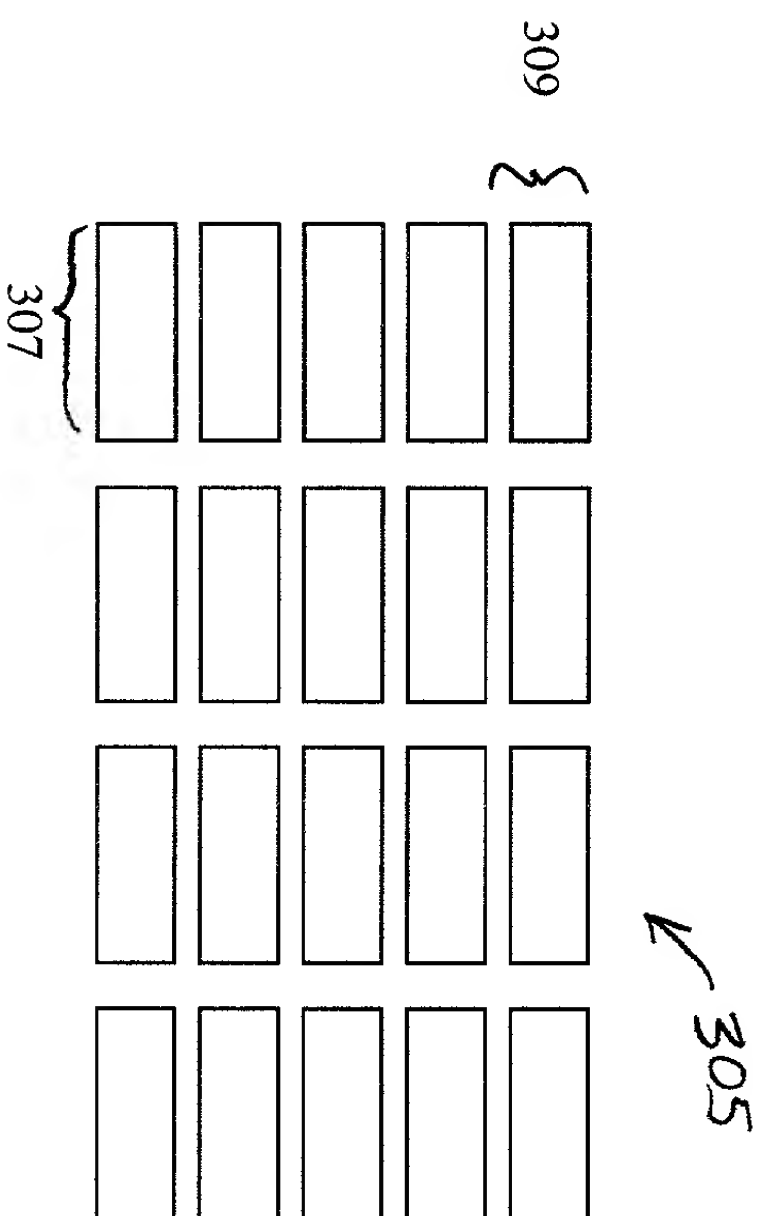


FIG. 4B

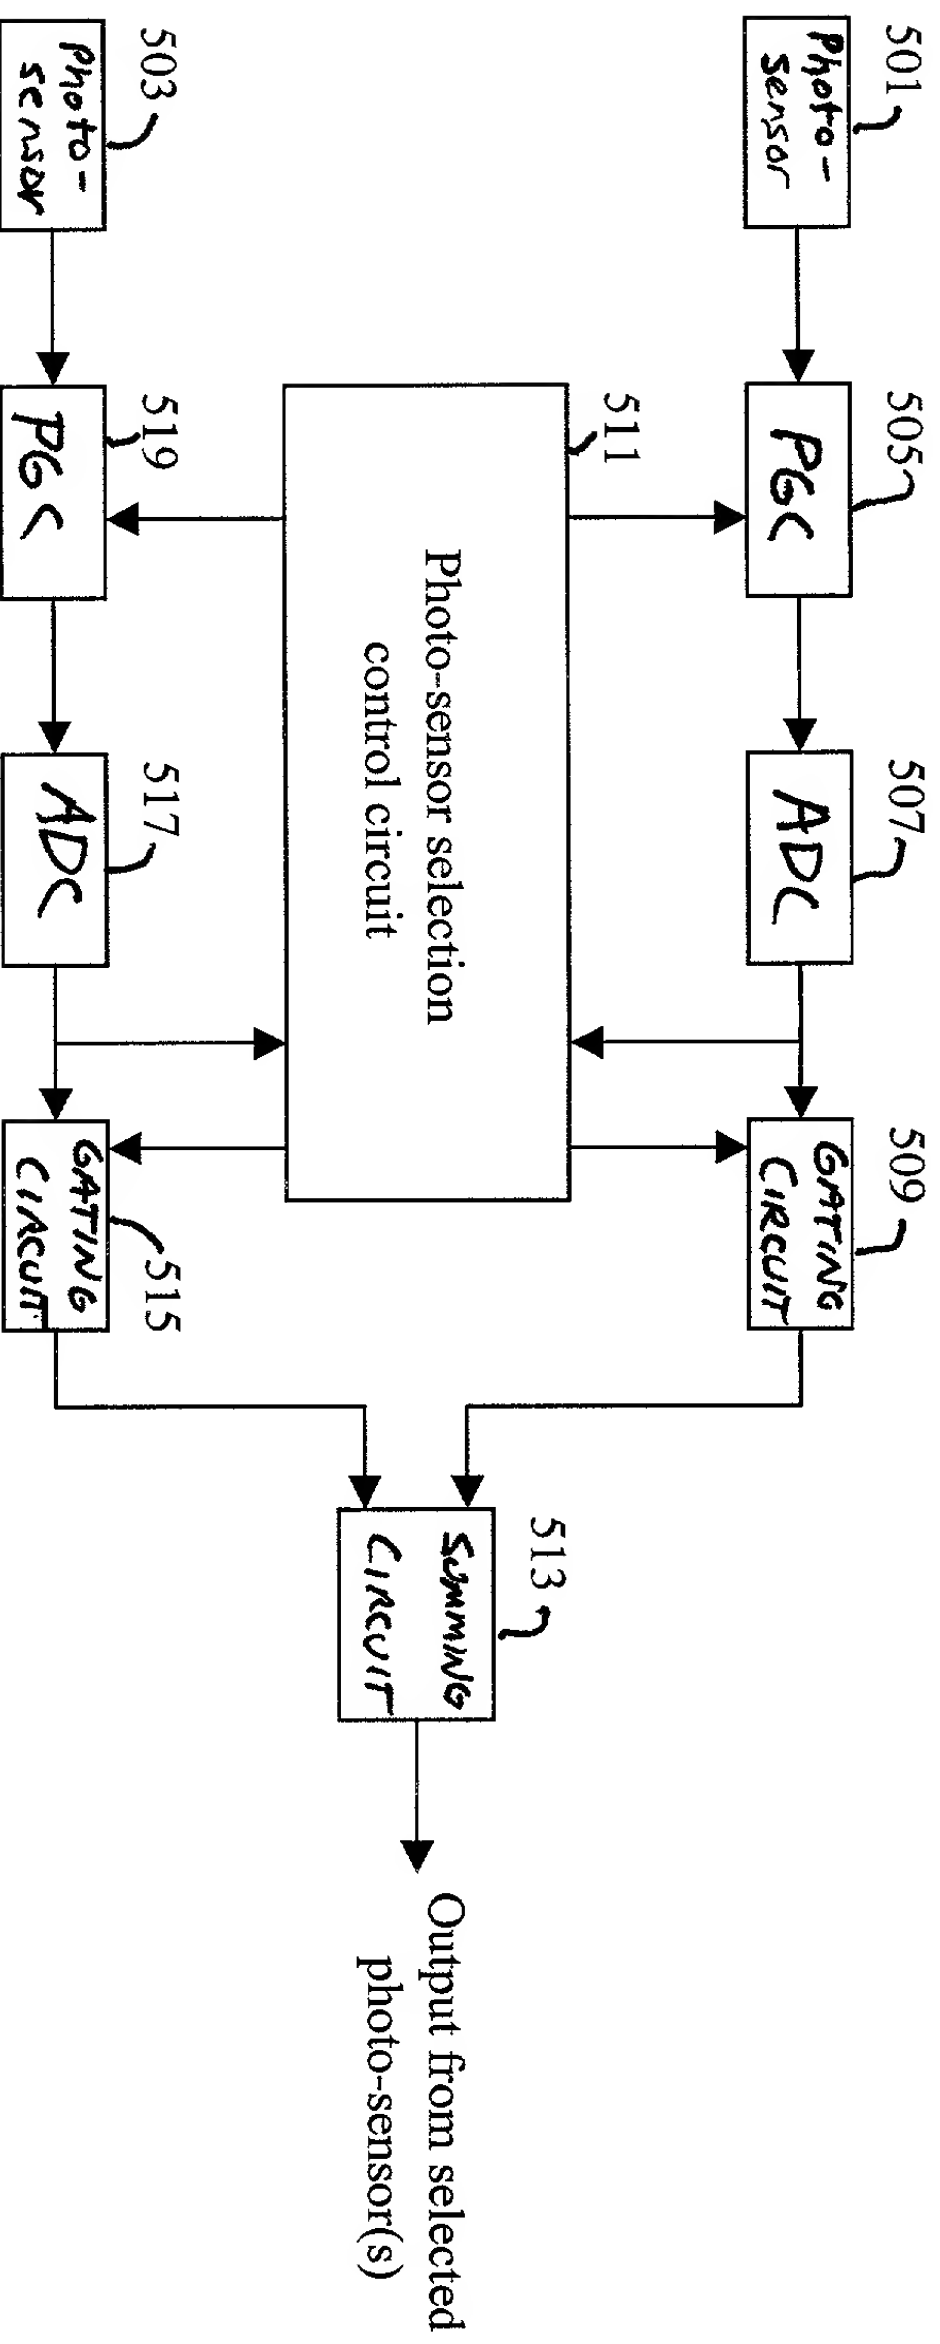


FIG. 5

DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **INFRARED COMMUNICATION SYSTEM UTILIZING RECEIVER WITH MULTIPLE PHOTO-SENSORS**, the specification of which

(check one) ☒ is attached hereto

☐ was filed on _____ as Application Serial No. _____, was amended on _____, and issued on _____ as U.S. Patent No. _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

PRIOR FOREIGN APPLICATION(S)			Priority Claimed
(Number)	(Country)	(Date Filed)	Yes/No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application or any international application designating the United States under Title 35, United

States Code, §365 listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56, regarding events which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Number)	(Country)	(Date Filed)
----------	-----------	--------------

(Number)	(Country)	(Date Filed)
----------	-----------	--------------

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

H. Shannon Tyson, Jr.	Reg. No. 42,193
James D. Bennett,	Reg. No. 37,550
Michael R. Cannatti,	Reg. No. 34,791
James B. Gambrell,	Reg. No. 17,920
Mark J. Gatschet	Reg. No. 42,569
Dennis W. Gilstad,	Reg. No. 36,810
Gary W. Hamilton,	Reg. No. 31,834
Mira L. Helms	Reg. No. 43,668
H. Dale Langley,	Reg. No. 35,927
Gloria L. Norberg,	Reg. No. 36,706
Russell C. Scott,	Reg. No. 43,103
Adam D. Sheehan,	Reg. No. 42,146
Richard J. Smith,	Reg. No. 30,496
Pete A. Smits	Reg. No. 39,036
Gary R. Stanford,	Reg. No. 35,689
J. Davis Gilmer,	Reg. No. P-44,711
Christopher J. Rourke,	Reg. No. 39,348
David R. Clonts,	Reg. No. 36,768
Greg K. Goshorn,	Reg. No. P-44,721
George W. Jordan, III,	Reg. No. 41,880
John A. Tang,	Reg. No. 43,404
Richard A. Schafer,	Reg. No. P-45,078
R. Scott Rhoades,	Reg. No. 44,300
Shayne X. Short,	Reg. No. P-45,105

Of:

Akin, Gump Strauss, Hauer & Feld, L.L.P.
 816 Congress Avenue, Suite 1900
 Austin, TX 78701
 (512) 499-6219; and

I also hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:


Joseph W. King,	Reg. No. 35,768
Daniel N. Yannuzzi,	Reg. No. 36,727
Semion Talpalatsky,	Reg. No. 35,380

Address all telephone calls to H. Shannon Tyson, Jr. at telephone no. (512) 499-6200

Address all correspondence to H. Shannon Tyson, Jr.
Akin, Gump, Strauss, Hauer & Feld, L.L.P.
816 Congress Avenue
1900 Frost Bank Building
Austin, Texas 78701

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

First named inventor:

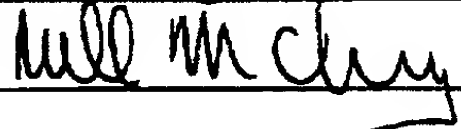Full name Randall M. Chung
 Inventor's Signature  Date September 29, 1999
 Residence Laguna Niguel Citizenship U.S.A.
 Post Office Address 30542 Via Estoril, Laguna Niguel, CA 92677